Panasonic® Hall Effect Sensor ICs

Panasonic's Hall IC is a combination of a Hall element, amplifier, Schmidt circuit, and stabilized power supply/temperature compensator integrated on an identical chip by using the IC technology. It amplifies Hall element output at the amplifier, converts into a digital signal through the Schmidt circuit, and drives the TTL or MOS IC directly. **Features:** • Stable temperature characteristics due to the additional temperature compensator • TTL and MOS ICs directly driveable by output • Semi-permanent service life due to no contact parts • Small change of the operating flux density against mechanical stress • Provided with the Output Pull-up Resistors (typical 27kΩ or Open Collector Output; *see footnote below*) • Operating Temperature: -40°C ~ 100°C • Supply Current Maximum: 6mA • Output Circuit Maximum: 20mA **Applications:** • Speed Sensors • Position Sensors • Rotation Sensors • Keyboard Switches • Microswitches

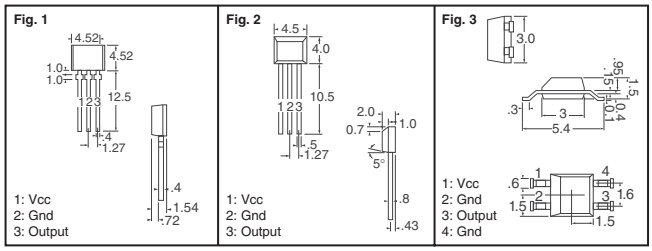

Fig.	Supply Voltage Range (V)	Operating** Flux Density (Gauss) (L-H)	(H-L)	Output* Type	Operating† Type	Pkg.	Digi-Key Part No.	Price Each 1	10	100
1	4.5 ~ 16	-175	175	0C	Bidirectional	3-Sip	DN6849SE-ND	1.51	1.22	.91
2	4.5 ~ 16	-120	120	Pull-up	Bidirectional	3-Sip	DN8897-ND◆	1.69	1.36	1.02
3	4.5 ~ 16	5	220	0C	Unidirectional	SOH-4D	DN6848S-E1VCT-ND◆	.82	.69	.55
		5	220		Unidirectional	SOH-4D	DN6848S-E1VTR-ND◆	362.00/1,000		
		-175	175		Bidirectional	SOH-4D	DN6849S-ND	1.69	1.36	1.02

* Output Type: *Pull-up* = 27K Internal; *0C* = Open Collector. ** To convert Gauss to millitesla, divide by 10
† *Unidirectional* is only sensitive to either north or southside of magnetic; *Bidirectional* is sensitive to an alternating magnetic fields of both north and south sides. ◆ ***RoHS Compliant***

Infrared Photosensors

RoHS Compliant Parts Available
(parts other than indicated may be available as RoHS compliant)

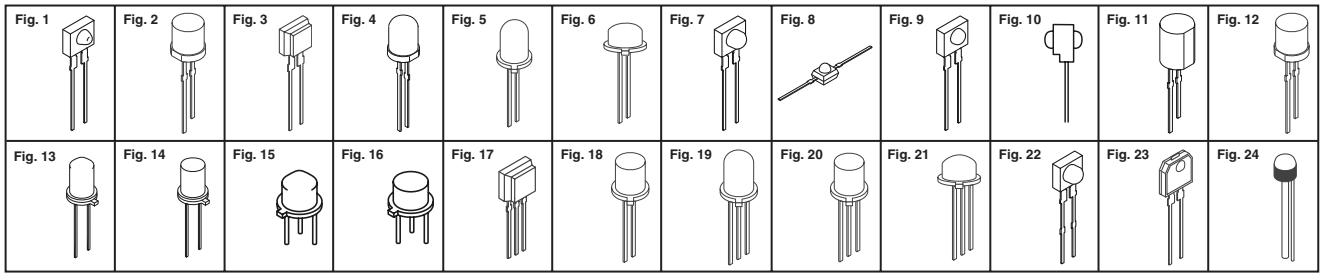

Infrared Light Emitting Diode

Fig.	Style/ Package	Pulse Forward Current (A)	Optical Power Output	Peak Emission Wave-length	Beam Angle	Digi-Key Part No.	Pricing 1	10	100	Panasonic Part No.
1	Side View	1	4.6mW	950nm	17°	LN54PA-ND◆	1.00	8.37	66.96	LN54
2	Top View	0.2	2.5mW	680nm	30°	LNA4501FV-ND◆	1.28	10.26	76.92	LNA4501FV
	Top View	1.5	7mW	950nm	45°	LN64PA-ND◆	.91	7.56	60.48	LN64
3	Side View	2	12mW	900nm	115°	LN175PA-ND◆	1.81	14.47	108.54	LN175
	Side View	1.5	3-6mW	940nm	80°	LNA2603F-ND◆	1.27	10.12	75.90	LNA2603F
4	T-1	1	3.5mW/sr	940nm	15°	LN69-ND◆	.46	3.46	25.96	LN69
	T-1	1	6mW/sr	940nm	15°	LNA2801L-ND◆	.67	5.03	37.73	LNA2801L
	T-1	1	2.5-5mW	950nm	20°	LNA2802L-ND◆	.45	3.61	27.08	LNA2802L
	T-1 3/4	1	10mW	860nm	20°	LN77L-ND◆	1.15	8.65	53.85	LN77L
	T-1 3/4	1	12mW/sr	860nm	22°	LNA4801L-ND◆	1.28	10.26	76.92	LNA4801L
	T-1 3/4	1.5	9mW/sr	950nm	20°	LNA2902L-ND◆	.46	3.46	25.96	LNA2902L
	T-1 3/4	1.5	9mW/sr	950nm	25°	LNA2903L-ND◆	.45	3.61	27.08	LNA2903L
	T-1 3/4	1.5	10mW/sr	950nm	20°	LNA2904L-ND◆	.89	7.42	59.33	LNA2904L
5	TO-18	2	3-6mW	950nm	8°	LN51L-ND◆	3.63	29.02	225.70	LN51L
	TO-18	2	5mW	950nm	8°	LNA2402L-ND◆	2.24	17.95	134.62	LNA2402L
6	TO-18 Small	0.2	1.5mW	680nm	80°	LNA4402L-ND◆	1.60	12.82	96.15	LNA4402L
	TO-18 Small	1.5	5-10mW	950nm	90°	LN152-ND◆	2.13	17.74	141.91	LN152
	TO-18 Small	2	3.5-6mW	950nm	100°	LN52-ND◆	3.05	24.38	189.59	LN52
7	Side View	1	1.8-3.5mW	950nm	35°	LN55-ND	.78	6.53	52.26	LN55
	Side View	1.5	4.3-5.5mW	950nm	35°	LN65-ND◆	1.29	10.34	77.52	LN65
8	Axial	1	3-4.5mW	950nm	18°	LNA2W01L-ND◆	1.35	11.29	90.28	LNA2W01L
9	Side View	1	6mW	880nm	25°	LN75X-ND◆	1.28	10.26	76.92	LN75X
	Side View	1	6-10mW	880nm	40°	LN78-ND◆	4.97	39.77	309.30	LN78
	Side View	1	1.8-3.5mW	950nm	35°	LN58-ND◆	.97	8.06	64.49	LN58
10	Side View x2	1	1.2mW/sr	940nm	23°	LNA2701L-ND	1.32	10.96	87.70	LNA2701L
	Side View x2	1	1.8mW	950nm	23°	LN59-ND	1.10	9.13	73.01	LN59
	Side View x2	1	1.8mW	940nm	23°	LNA2702L-ND*◆	.62	4.62	34.62	LNA2702L

◆ ***RoHS Compliant*** * Long Leads

NPN Photo Transistor

Fig.	Style/ Package	V_{CEO} (V)	I_C (mA)	Peak Sensitivity Wave-length	tr/tf (µs)	Digi-Key Part No.	Pricing 1	10	100	Panasonic Part No.
1	Side View	20	20	800nm	4	PNZ154-ND◆	1.39	11.61	92.88	PNZ154
3	Side View	20	10	800nm	4	PNZ155-ND	1.25	10.43	83.47	PNZ155
4	T-1	30	20	800nm	4	PNA1801LS-ND◆	.56	4.23	31.73	PNA1801LS
	T-1	30	20	850nm	4	PNA1801L00NC-ND◆	.56	4.23	31.73	PNA1801L00NC

Fig.	Style/ Package	V_{CEO} (V)	I_C (mA)	Peak Sensitivity Wave-length	tr/tf (µs)	Digi-Key Part No.	Pricing 1	10	100	Panasonic Part No.
4	T-1	30	20	850nm	4	PNA1801LS0NC-ND◆	.56	4.23	31.73	PNA1801LS0NC
5	TO-18	30	50	800nm	3	PNA1401L-ND◆	3.56	28.46	221.32	PNA1401L
	TO-18	20	30	900nm	5/6	PNZ107-ND◆	2.24	17.95	134.62	PNZ107
7	Side View	20	30	850nm	100	PNA2602M-ND‡	1.14	9.49	75.88	PNA2602M
	Side View	20	20	800nm	4-10	PNZ150-ND	1.06	8.85	70.82	PNZ150
8	Axial	20	30	800nm	200	PNA2W01M-ND‡◆	1.76	14.64	117.10	PNA2W01M
	Axial	20	20	800nm	2.5/3.5	PNZ12700S-ND◆	1.20	9.99	79.92	PNZ12700S
	Axial	20	20	800nm	3-10	PNZ14700R-ND◆	.96	8.01	64.10	PNZ14700R
	Axial	20	20	800nm	3-10	PNZ14700S-ND◆	.96	8.01	64.10	PNZ14700S
	Axial	20	20	800nm	3-10	PNZ147-ND◆	1.58	12.65	94.85	PNZ147
9	Side View	20	3	800nm	100	PNA2603L-ND‡	1.14	9.49	75.88	PNA2603L
17	Side View	20	10	900nm	8	PNA1605F-ND◆	1.51	12.10	90.72	PNA1605F
18	TO-18 Flat	30	50	800nm	3	PNA1401LF-ND◆	3.56	28.46	221.32	PNA1401LF
19	TO-18	40†	50	800nm	3	PNZ102-ND◆	3.56	28.46	221.32	PNZ102
	TO-18	30†	30	900nm	5/6	PNZ108-ND◆	3.56	28.46	221.32	PNZ108
	TO-18	30†	30	900nm	5/6	PNZ109L-ND	3.56	28.46	221.32	PNZ109L
20	TO-18 Flat	30†	30	900nm	8/9	PNZ109F-ND◆	3.56	28.46	221.32	PNZ109F
21	TO-18 Small	30†	20	900nm	5/6	PNZ108CL-ND◆	2.99	23.90	185.91	PNZ108CL
	TO-18 Small	20	20	900nm	5/6	PNZ108CLR-ND◆	1.60	12.82	96.15	PNZ108CLR
	TO-18 Small	20	20	900nm	5/6	PNZ108CLS-ND◆	1.60	12.82	96.15	PNZ108CLS
	TO-18 Small	30†	20	900nm	5/6	PNZ109CL-ND◆	2.99	23.90	185.91	PNZ109CL
22	Side View	20	20	800nm	4	PNA1608L-ND	1.06	8.85	70.82	PNA1608L
23	Side View	20	20	850nm	4	PNA1601M-ND	.81	6.76	54.05	PNA1601M
24	T-1	20	10	800nm	1/1.3	PNZ121S0R-ND◆	1.20	10.03	80.27	PNZ121S0R

◆ ***RoHS Compliant*** † V_{CBO} *(This device has signal mixing capability using the base pin.)* ‡ Darlington

Pin Photo Diode

Fig.	Style/ Package	V_R (V)	Peak Sensitivity Wavelength	tr/tf (ns)	Beam Angle	Digi-Key Part No.	Pricing 1	10	100	Panasonic Part No.
3	Side View	30	850nm	2	70°	PNZ335-ND◆	1.26	10.12	75.88	PNZ335
6	TO-18 Small	30	850nm	2	70°	PNZ330CL-ND	2.99	23.90	185.91	PNZ330CL
11	Side View	30	900nm	50	70°	PNZ323-ND◆	1.38	11.54	92.31	PNZ323
	Side View	30	900nm	50	70°	PNZ327-ND◆	1.38	11.54	92.31	PNZ327
	Side View	30	960nm	50	70°	PNZ323B-ND◆	.91	7.56	60.48	PNZ323B
12	Top View	50	850nm	2	70°	PNZ334-ND◆	1.46	12.15	97.20	PNZ334
13	TO-18	50	800nm	1	10°	PNZ300-ND	6.14	49.10	414.27	PNZ300
14	TO-18	50	800nm	1	40°	PNZ300F-ND	6.14	49.10	414.27	PNZ300F
15	TO-18	30	900nm	2	70°	PNZ331CL-ND	3.66	29.31	227.95	PNZ331CL
16	TO-18	30	900nm	—	40°	PNZ331F-ND	7.11	56.85	479.68	PNZ331F

◆ ***RoHS Compliant***

IrDA Transceiver Modules

Digi-Reel® RoHS COMPLIANT

V_{CC} Maximum (V)	IrDA Maximum (kbps)	Pin Count	Digi-Key Part No.	Cut Tape Price Each 1	25	100	Digi-Key Part No.	Tape and Reel Qty.	Pricing	Panasonic Part No.
3.3	115.2	7-Pin + 1 Shield	CND0204ACT-ND	1.60	1.29	.97	CND0204ATR-ND	2,500	820.00/M	CND0204A
4.5	115.2	7-Pin + 1 Shield	CND0215ACT-ND	1.60	1.29	.97	CND0215ATR-ND	2,500	820.00/M	CND0215A
3.3	115.2	7-Pin + 2 Shield	CND0208ACT-ND	1.60	1.29	.97	CND0208ATR-ND	2,000	833.00/M	CND0208A
3.3	115.2	7-Pin + 2 Shield	CND0214ACT-ND	1.60	1.29	.97	CND0214ATR-ND	2,000	833.00/M	CND0214A
3.3	115.2	7-Pin + 2 Shield	CND0209ACT-ND	1.60	1.29	.97	CND0209ATR-ND	2,000	833.00/M	CND0209A
4.5	115.2	7-Pin + 2 Shield	CND0216ACT-ND	1.60	1.29	.97	CND0216ATR-ND	2,000	833.00/M	CND0216A



N

Digi-Reel® Most SMT cutdown parts are available on a Digi-Reel®. For Digi-Reel part number, change 1-ND to 6-ND or CT-ND to DKR-ND. See Digi-Key® Services on page 2 for additional information.