

DELTA DC 轴向风扇和鼓风机

产品范围广, 包括 25mm 至 172mm 的轴流式风机和 30mm 至 159mm 的鼓风机。
 特点: • 独特的叶片设计 • 无刷 • 通过 TS16949 认证 • 通过 ISO-9001 认证 • 滚珠轴承 • 引线

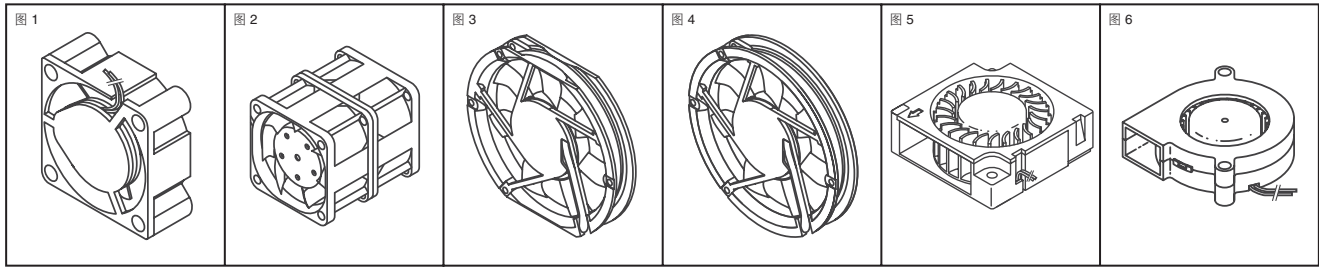


图	尺寸 (mm)	额定电压	工作温度范围	额定电流 (A)	额定输入功率 (W)	速度 (RPM)	CFM	噪音 (Db)	传感器	Digi-Key 零件编号	1	10	100	Delta 零件编号	护指罩	单价
轴向风扇																
1	25 x 25 x 10	12	7.0 ~ 13.2	.080	0.96	13000	2.40	28.0	—	603-1129-ND	12.72	8.40	6.96	AFB02512HHA-A	—	—
	35 x 35 x 10	12	9.5 ~ 13.8	.090	1.08	7000	5.50	22.0	—	603-1128-ND	12.72	8.40	6.96	AFB03512HA-A	CR378-ND	.66
	40 x 40 x 10	12	7.0 ~ 13.8	.060	.72	5000	5.90	24.5	—	603-1002-ND	9.78	7.44	6.38	EFB0412MA	CR230-ND	.65
		12	7.0 ~ 13.8	.080	.96	6000	6.92	28.5	—	603-1003-ND	9.78	7.44	6.38	EFB0412HA	CR230-ND	.65
		12	7.0 ~ 13.8	.100	1.20	7000	8.09	33.0	—	603-1004-ND	11.26	7.44	6.17	EFB0412HHA	CR230-ND	.65
		12	7.0 ~ 13.8	.130	1.56	8300	11.48	32.0	—	603-1005-ND	11.81	9.09	7.62	AFB0412HHB	CR230-ND	.65
	40 x 40 x 15	12	7.0 ~ 13.8	.250	3.00	11000	14.83	41.5	—	603-1006-ND	11.81	9.09	7.62	AFB0412SHB	CR230-ND	.65
		5	4.5 ~ 5.5	.250	1.25	7600	8.54	28.5	—	603-1007-ND	10.93	8.32	7.13	EFB0405HD	CR230-ND	.65
	40 x 40 x 20	5	4.5 ~ 5.5	.320	1.60	9000	10.10	32.5	Tac	603-1008-ND	13.25	8.75	7.25	EFB0405VHD-F00	CR230-ND	.65
		12	7.0 ~ 13.8	.080	0.96	7600	8.54	28.5	—	603-1009-ND	12.59	8.32	6.89	EFB0412HD	CR230-ND	.65
		12	7.0 ~ 13.8	.120	1.44	9000	10.10	32.5	—	603-1010-ND	12.59	8.32	6.89	EFB0412VHD	CR230-ND	.65
		24	14.0 ~ 27.6	.040	0.96	5000	5.54	22.0	—	603-1011-ND	10.93	8.32	7.13	EFB0424LD	CR230-ND	.65
		12	4.5 ~ 13.8	.070	0.84	6500	10.59	32.1	Tac	603-1012-ND	16.43	10.85	8.99	FFB0412HN-F00	CR230-ND	.65
	40 x 40 x 28	12	4.0 ~ 13.8	.500	6.00	13000	24.00	51.5	Tac	603-1013-ND	18.82	12.43	10.30	FFB0412SHN-F00	CR230-ND	.65
		12	4.5 ~ 13.2	.160	1.92	9500	15.79	41.9	—	603-1014-ND	13.39	10.30	8.63	FFB0412VHN	CR230-ND	.65
		12	4.5 ~ 13.2	.160	1.92	9500	15.79	41.9	—	603-1015-ND	16.43	10.85	8.99	FFB0412VHN-B	CR230-ND	.65
		12	4.5 ~ 13.2	.160	1.92	9500	15.79	41.9	Tac	603-1016-ND	16.43	10.85	8.99	FFB0412VHN-F00	CR230-ND	.65
		12	4.5 ~ 13.2	.160	1.92	9500	15.79	41.9	—	603-1017-ND	16.43	10.85	8.99	FFB0412VHN-R00	CR230-ND	.65
		24	14.0 ~ 26.4	.100	2.40	9500	15.79	41.9	锁定转子	603-1018-ND	15.77	10.42	8.63	FFB0424VHN	CR230-ND	.65
		12	7.0 ~ 13.2	.850	10.20	12000	24.00	60.0	Tac	603-1019-ND	31.14	20.57	17.04	GFB0412SHG-F00	CR230-ND	.65
12		7.0 ~ 13.2	1.25	15.00	15000	27.30	59.5	Tac	603-1020-ND	31.14	20.57	17.04	GFB0412EHS-F00	CR230-ND	.65	
1	45 x 45 x 10	12	7.0 ~ 13.8	.110	1.32	5000	9.85	30.0	—	603-1021-ND	11.81	9.09	7.62	AFB04512MA	—	—
	5	4.5 ~ 5.5	.130	0.65	4500	9.21	25.0	Tac	603-1022-ND	11.93	7.88	6.53	EFB0505MA-F00	CR379-ND	.86	
	5	7.0 ~ 13.8	.100	1.20	5500	11.4	30.0	—	603-1023-ND	9.78	7.44	6.38	EFB0512HA	CR379-ND	.86	
	50 x 50 x 10	12	7.0 ~ 13.8	.100	1.20	5600	14.13	32.0	—	603-1024-ND	13.91	9.19	7.62	AFB0512HB	CR379-ND	.86
	50 x 50 x 15	12	7.0 ~ 13.8	.160	1.92	7000	20.30	40.5	—	603-1025-ND	13.91	9.19	7.62	AFB0512VHD	CR379-ND	.86
	60 x 60 x 10	12	7.0 ~ 13.8	.180	2.16	4800	21.19	36.5	—	603-1026-ND	12.59	8.32	6.89	EFB0612HHA	CR221-ND	.68
	5	4.0 ~ 6.0	.300	1.50	4000	15.36	32.0	—	603-1027-ND	13.91	9.19	7.62	AFB0605HB	CR221-ND	.68	
	24	14.0 ~ 27.6	.080	1.92	4000	15.36	32.0	—	603-1028-ND	13.91	9.19	7.62	AFB0624HB	CR221-ND	.68	
	60 x 60 x 20	12	7.0 ~ 13.8	.150	1.80	4400	18.36	31.0	—	603-1029-ND	11.81	9.09	7.62	AFB0612HHD	CR221-ND	.68
	60 x 60 x 25.4	12	4.0 ~ 13.8	.080	0.96	3100	16.81	26.5	—	603-1030-ND	15.50	10.24	8.49	AFB0612L-A	CR221-ND	.68
		12	4.0 ~ 13.8	.140	1.68	4250	23.38	34.0	—	603-1031-ND	13.16	10.13	8.49	AFB0612H-A	CR221-ND	.68
		12	4.0 ~ 13.8	.170	2.04	5000	27.55	40.0	—	603-1032-ND	11.81	9.09	7.62	AFB0612HH-A	CR221-ND	.68
		12	4.0 ~ 13.8	.270	3.24	6000	34.15	44.5	Tac	603-1033-ND	16.83	11.12	9.21	AFB0612SH-ABF00	CR221-ND	.68
		12	4.0 ~ 13.8	.270	3.24	6000	34.15	44.5	Tac	603-1034-ND	16.17	10.68	8.85	AFB0612SH-AF00	CR221-ND	.68
		12	4.0 ~ 13.8	.380	4.56	6800	38.35	46.5	Tac	603-1035-ND	16.83	11.12	9.21	AFB0612EH-ABF00	CR221-ND	.68
		24	14.0 ~ 27.6	.090	2.16	4250	23.38	34.0	—	603-1036-ND	15.50	10.24	8.49	AFB0624H-A	CR221-ND	.68
		24	14.0 ~ 27.6	.110	2.64	5000	27.55	40.0	—	603-1037-ND	15.50	10.24	8.49	AFB0624HH-A	CR221-ND	.68
	60 x 60 x 38	12	4.5 ~ 13.8	.340	4.08	6000	36.73	46.5	—	603-1038-ND	18.15	11.99	9.94	FFB0612VHE	CR221-ND	.68
		12	4.5 ~ 13.8	.550	6.60	7000	43.44	50.5	—	603-1039-ND	15.07	11.86	9.94	FFB0612SHE	CR221-ND	.68
		12	4.5 ~ 13.8	.800	9.60	8000	50.15	54.5	—	603-1040-ND	18.15	11.99	9.94	FFB0612EHE	CR221-ND	.68
12		7.0 ~ 13.8	.680	8.16	9000	49.54	54.0	—	603-1041-ND	20.41	13.48	11.17	AFB0612VHE-A	CR221-ND	.68	
2	60 x 60 x 50.8	12	7.0 ~ 13.8	.430	5.16	5000	32.14	50.5	—	603-1042-ND	24.70	20.14	17.29	GFB0612HHG	CR221-ND	.68
1	70 x 70 x 20	12	5.0 ~ 13.8	.250	3.00	4400	40.43	40.5	—	603-1043-ND	11.81	9.09	7.62	AFB0712HHD	—	—
	70 x 70 x 25.4	12	5.0 ~ 12.6	.440	5.28	5500	51.97	47.5	—	603-1044-ND	13.91	9.19	7.62	AFB0712VH-A	—	—
		12	5.0 ~ 13.8	.650	7.80	6300	61.05	50.5	—	603-1045-ND	16.96	11.20	9.28	AFB0712SH-AB	—	—
		24	14.0 ~ 26.4	.090	2.16	3100	28.85	31.5	—	603-1046-ND	13.16	10.13	8.49	AFB0724M-A	—	—
	80 x 80 x 15	12	7.0 ~ 13.8	.190	2.28	3700	39.20	39.5	Tac	603-1047-ND	14.58	9.63	7.98	AFB0812VHB-F00	CR180-ND	.93
	80 x 80 x 20	12	7.0 ~ 13.8	.220	2.64	4000	48.20	41.0	—	603-1048-ND	13.91	9.19	7.62	AFB0812SHD	CR180-ND	.93
	80 x 80 x 25.4	5	4.5 ~ 5.5	.430	2.15	3000	35.31	31.0	—	603-1049-ND	13.91	9.19	7.62	AFB0805H	CR180-ND	.93
		12	7.0 ~ 13.8	.160	1.92	3000	35.31	31.0	—	603-1050-ND	13.91	9.19	7.62	AFB0812H	CR180-ND	.93
		12	7.0 ~ 13.8	.200	2.40	3250	37.43	34.0	—	603-1051-ND	13.91	9.19	7.62	AFB0812HH	CR180-ND	.93

(转下页)

全部产品均以美元计价。 免费电话: 10800-1527031 (China Telecom - 中国电讯) — 10800-8527031 (CNCG - 中国网通)

2294 (CN082-09)

digikey.com.cn — 电话: (852) 3104 0500 — 传真: (852) 3104 0686



DC 轴向风扇和鼓风机 (接上页)



图	尺寸 (mm)	额定电压	工作温度范围	额定电流 (A)	额定输入功率 (W)	速度 (RPM)	CFM	噪音 (Db)	传感器	Digi-Key 零件编号	单价			Delta 零件编号	护罩	单价		
											10	100	1000					
1	80 x 80 x 25.4	12	7.0 ~ 13.8	.200	2.40	3250	37.43	34.0	Tac	603-1052-ND	14.58	9.63	7.98	AFB0812HH-F00	CR180-ND	.93		
		12	7.0 ~ 13.2	.260	3.12	3500	47.22	41.7	—	603-1053-ND	19.01	14.94	12.90	FFB0812HH	CR180-ND	.93		
		12	7.0 ~ 13.8	.340	4.08	4000	46.62	40.0	Tac	603-1054-ND	14.58	9.63	7.98	AFB0812SH-F00	CR180-ND	.93		
		12	7.0 ~ 13.2	.500	6.00	4500	67.02	48.6	—	603-1055-ND	19.01	14.94	12.90	FFB0812SH	CR180-ND	.93		
	80 x 80 x 38	12	7.0 ~ 13.8	.380	4.56	4200	57.21	44.5	—	603-1056-ND	18.15	11.99	9.94	FFB0812VHE	CR180-ND	.93		
		12	7.0 ~ 13.8	.580	6.96	4900	68.51	48.5	—	603-1057-ND	18.15	11.99	9.94	FFB0812SHE	CR180-ND	.93		
		12	7.0 ~ 13.8	.900	10.80	5700	80.16	52.5	Tac	603-1058-ND	18.82	12.43	10.30	FFB0812EHE-F00	CR180-ND	.93		
		12	7.0 ~ 13.2	1.15	13.80	6600	89.95	59.8	—	603-1059-ND	22.22	17.48	14.65	FFB0812GHE	CR180-ND	.93		
		12	7.0 ~ 13.2	1.50	18.00	7500	102.02	62.2	—	603-1060-ND	20.20	16.47	14.14	FFB0812UHE	CR180-ND	.93		
		12	7.0 ~ 13.2	2.75	33.00	9000	132.56	65.0	—	603-1061-ND	26.80	21.85	18.76	FFB0812DHE	CR180-ND	.93		
		2	80 x 80 x 50.8	12	7.0 ~ 13.2	.730	8.76	4200	68.58	53.0	Tac	603-1062-ND	33.39	22.05	18.27	GFB0812SHG-F00	CR180-ND	.93
		1	92 x 92 x 20	24	14.0 ~ 27.6	.100	2.40	2700	54.60	35.0	—	603-1063-ND	11.81	9.09	7.62	AFB0924HD	CR220-ND	.77
12	7.0 ~ 13.8			.160	1.92	2850	51.21	34.0	—	603-1064-ND	13.91	9.19	7.62	AFB0912H	CR220-ND	.77		
12	7.0 ~ 13.8			.250	3.00	3200	57.92	38.0	—	603-1065-ND	13.91	9.19	7.62	AFB0912HH	CR220-ND	.77		
12	7.0 ~ 13.8			.600	7.20	3700	81.97	48.2	—	603-1066-ND	15.07	11.86	9.94	FFB0912VH	CR220-ND	.77		
12	7.0 ~ 13.8			.400	4.80	3800	67.80	45.0	—	603-1067-ND	11.81	9.09	7.62	AFB0912VH	CR220-ND	.77		
24	14.0 ~ 27.6			.080	1.92	2450	43.79	30.0	—	603-1068-ND	11.81	9.09	7.62	AFB0924M	CR220-ND	.77		
92 x 92 x 38	24		14.0 ~ 27.6	.100	2.40	2850	51.21	34.0	—	603-1069-ND	13.91	9.19	7.62	AFB0924H	CR220-ND	.77		
	24		14.0 ~ 27.6	.220	5.28	3800	67.80	45.0	—	603-1070-ND	13.91	9.19	7.62	AFB0924VH	CR220-ND	.77		
	12		7.0 ~ 13.2	1.22	14.64	6000	129.31	60.5	—	603-1071-ND	27.30	22.25	19.11	FFB0912GHE	CR220-ND	.77		
	24		14.0 ~ 27.6	.280	6.72	3800	85.46	47.5	—	603-1072-ND	18.95	12.52	10.37	FFB0924VHE	CR220-ND	.77		
	48		28.0 ~ 53.0	.200	9.60	4400	100.29	52.5	—	603-1073-ND	24.12	15.93	13.20	FFB0948SHE	CR220-ND	.77		
	100 x 100 x 38		12	7.0 ~ 12.6	2.20	26.40	5000	143.09	62.0	—	603-1074-ND	31.93	21.09	17.48	FFB1012EHE	—	—	
1	120 x 120 x 25.4		12	7.0 ~ 13.8	.230	2.76	2500	82.67	38.5	—	603-1075-ND	14.52	11.42	9.57	AFB1212H	CR210-ND	1.72	
			12	7.0 ~ 13.8	.330	3.96	2800	95.14	41.5	—	603-1076-ND	17.49	11.55	9.57	AFB1212HH	CR210-ND	1.72	
			24	14.0 ~ 27.6	.280	6.72	3400	113.11	46.5	—	603-1077-ND	18.29	12.08	10.01	AFB1224SH	CR210-ND	1.72	
	120 x 120 x 38		12	4.0 ~ 13.2	.600	7.20	3200	129.96	48.0	Tac	603-1078-ND	20.27	13.39	11.10	AFB1212VHE-F00	CR210-ND	1.72	
			12	7.0 ~ 13.2	1.00	12.00	3200	151.85	53.0	—	603-1080-ND	31.93	21.09	17.48	FFB1212VHE	CR210-ND	1.72	
			12	7.0 ~ 13.2	1.50	18.00	3600	170.92	56.5	Tac	603-1081-ND	32.60	21.53	17.84	FFB1212SHE-F00	CR210-ND	1.72	
			12	4.0 ~ 13.2	1.05	12.60	3700	151.85	53.0	—	603-1082-ND	16.28	12.58	10.73	AFB1212SHE	CR210-ND	1.72	
			12	7.0 ~ 13.2	2.00	24.00	4000	190.00	59.0	Tac	603-1083-ND	32.60	21.53	17.84	FFB1212EHE-F00	CR210-ND	1.72	
			12	8.0 ~ 13.2	2.70	32.40	4800	217.80	64.0	—	603-1084-ND	42.00	27.74	22.99	FFB1212GHE	CR210-ND	1.72	
			24	7.0 ~ 27.6	.240	5.76	2600	105.94	41.0	—	603-1085-ND	16.94	13.09	10.98	AFB1224HE	CR210-ND	1.72	
			24	7.0 ~ 27.6	.380	9.12	3200	129.96	48.0	—	603-1086-ND	16.94	13.09	10.98	AFB1224VHE	CR210-ND	1.72	
			24	14.0 ~ 26.4	1.00	24.00	4000	190.00	59.0	—	603-1088-ND	33.52	22.14	18.35	FFB1224EHE	CR210-ND	1.72	
48	28.0 ~ 53.0		.500	24.00	4000	190.00	59.0	Tac	603-1089-ND	38.29	25.29	20.96	FFB1248EHE-F00	CR210-ND	1.72			
48	32.0 ~ 80.0		.910	43.68	5300	223.22	68.0	—	603-1090-ND	54.00	45.00	40.50	FHB1248UHE	CR210-ND	1.72			
2	120 x 120 x 50.8		12	7.0 ~ 13.2	2.82	33.84	3400	184.45	65.0	—	603-1091-ND	63.60	42.00	34.80	GFB1212VHG	CR210-ND	1.72	
			24	14.0 ~ 26.4	1.80	43.20	3700	203.41	67.6	—	603-1092-ND	63.60	42.00	34.80	GFB1224SHG	CR210-ND	1.72	
120 x 120 x 76.2	12		7.0 ~ 13.2	2.65	31.80	3550	220.29	59.0	—	603-1093-ND	43.70	35.65	31.63	GFB1212VHW	CR210-ND	1.72		
1	127 x 127 x 38		12	7.0 ~ 13.2	1.85	22.20	3450	180.00	56.5	—	603-1094-ND	31.20	25.60	22.40	FFB1312SHE	CR200-ND	2.51	
			12	8.5 ~ 13.2	2.74	32.88	3850	200.02	59.5	—	603-1095-ND	31.20	25.60	22.40	FFB1312EHE	CR200-ND	2.51	
			24	14.0 ~ 26.4	.840	20.16	3450	180.00	56.5	—	603-1096-ND	45.71	30.19	25.02	FFB1324SHE-B	CR200-ND	2.51	
3	140 x 140 x 50.8		48	28.0 ~ 53.0	.770	36.96	3600	273.09	61.7	Tac	603-1097-ND	74.86	49.44	40.97	FFB1448SHG-F00	CR196-ND	3.02	
			12	6.0 ~ 14.0	.980	11.76	3000	202.54	52.0	—	603-1126-ND	51.57	42.98	38.68	AFB1512H-A	CR196-ND	3.02	
			12	6.0 ~ 14.0	1.17	14.04	3200	214.85	53.5	—	603-1099-ND	51.57	42.98	38.68	AFB1512HH-A	CR196-ND	3.02	
			24	12.0 ~ 30.0	.310	7.44	2400	160.77	46.0	—	603-1125-ND	75.92	50.14	41.55	AFB1524L-A	CR196-ND	3.02	
	48	32.0 ~ 80.0	.520	24.96	4000	271.05	61.0	—	603-1101-ND	108.73	71.81	59.50	AHB1548EH	CR196-ND	3.02			
	172 x 150 x 50.8	24	12.0 ~ 28.0	.560	13.44	3350	251.79	55.0	—	603-1102-ND	68.9	45.50	39.50	EFB1524HG	CR196-ND	3.02		
24		12.0 ~ 28.0	.970	23.28	4000	302.29	60.0	—	603-1103-ND	49.40	40.30	35.75	EFB1524VHG	CR196-ND	3.02			
48		24.0 ~ 60.0	.310	14.88	3350	251.79	55.0	Tac	603-1104-ND	72.21	47.69	39.52	EFB1548HG-F00	CR196-ND	3.02			
4	172 x 25.4	12	6.0 ~ 14.0	.980	11.76	3000	202.54	52.0	—	603-1105-ND	61.79	50.41	44.72	AFB1712H-A	CR206-ND	2.84		
		12	6.0 ~ 14.0	1.17	14.04	3200	214.85	53.5	—	603-1106-ND	86.18	56.91	47.16	AFB1712HH-A	CR206-ND	2.84		
		24	12.0 ~ 30.0	.310	7.44	2400	160.77	46.0	—	603-1107-ND	61.79	50.41	44.72	AFB1724L-A	CR206-ND	2.84		
		48	24.0 ~ 60.0	.270	12.96	3000	202.54	52.0	—	603-1127-ND	90.26	59.61	49.39	AFB1748H-A	CR206-ND	2.84		
172 x 50.8	12	8.0 ~ 14.0	1.79	21.48	3700	279.69	55.0	—	603-1109-ND	66.25	43.75	36.25	EFB1712HHG	CR206-ND	2.84			
	24	12.0 ~ 28.0	1.17	28.08	4300	325.00	59.0	Tac	603-1130-ND	48.56	40.17	36.10	EFB1724SHG-F00	CR206-ND	2.84			
	48	26.0 ~ 54.0	1.90	91.20	4600	432.77	72.0	—	603-1111-ND	52.20	43.50	39.15	FFB1748VHG	CR206-ND	2.84			
鼓风机																		
5	30 x 30 x 10	12	7.0 ~ 13.2	.070	0.84	7500	1.45	29.0	—	603-1112-ND	11.48	8.83	7.40	BFB0312HA	—	—		
	40 x 40 x 10	5	4.0 ~ 6.0	.220	1.10	8500	3.00	34.5	—	603-1113-ND	14.84	9.80	8.12	BFB0405HHA-A	—	—		
6	51 x 51 x 15	12	10.0 ~ 13.8	.160	1.92	5500	3.88	38.0	锁定转子	603-1114-ND	18.15	11.99	9.94	BFB0512H-F00	—	—		
		12	10.0 ~ 13.8	.210	2.52	6000	4.59	45.0	Tac	603-1115-ND	18.15	11.99	9.94	BFB0512HH-F00	—	—		
		24	14.0 ~ 27.6	.110	2.64	6500	4.59	45.0	—	603-1116-ND	17.49	11.55	9.57	BFB0524HH	—	—		
	60 x 60 x 25	12	5.0 ~ 13.8	.180	2.16	3200	6.71	34.0	—	603-1117-ND	12.60	9.69	8.12	BFB0612H	—	—		
	75 x 75 x 30	12	7.0 ~ 13.8	.220	2.64	2900	11.30	38.0	—	603-1118-ND	20.67	13.65	11.31	BFB0712H	—	—		
	97 x 94 x 33	12	4.0 ~ 13.8	.800	9.60	3600	25.43	52.0	Tac	603-1119-ND	24.38	16.10	13.34	BFB1012H-F00	—	—		
		24	7.0 ~ 27.6	.400	9.60	3600	25.43	52.0	Tac	603-1120-ND	24.38	16.10	13.34	BFB1024H-F00	—			